
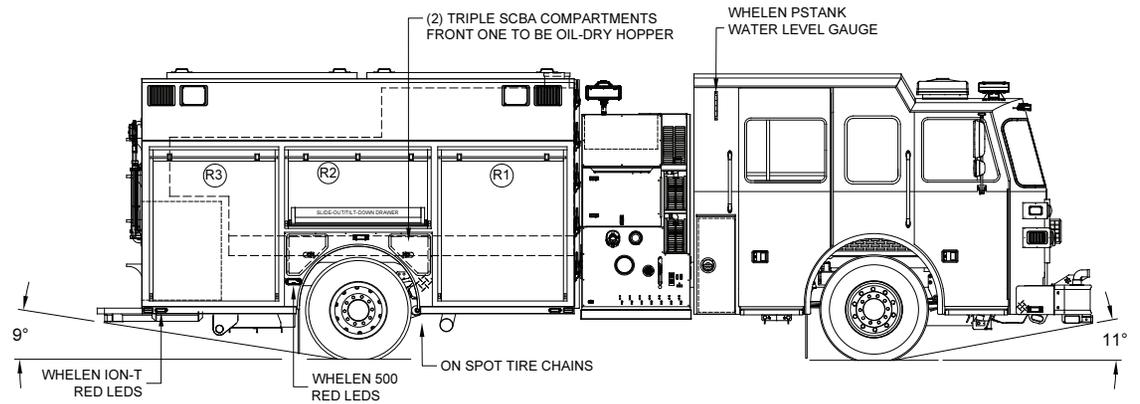


LADDER CHUTE
 (1) 24' 2-SEC
 (1) 14' ROOF
 (1) 10' FOLDING
 (1) BACKBOARD
 (2) NY HOOK
 PIKE POLES



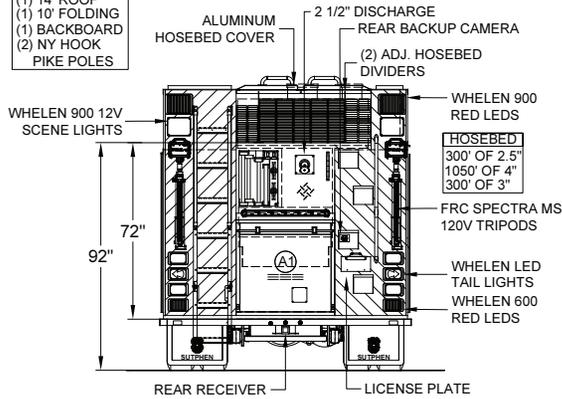


LEFT SIDE COMPARTMENTS				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
L1	ROLL-UP	50.5" w X 55.4" h	56.1" w X 66" h X 27.3" d	58.5 CU. FT.
L2	ROLL-UP	57.5" w X 26.2" h	61.6" w X 36.8" h X 27.3" d	35.8 CU. FT.
L3	ROLL-UP	50.5" w X 55.4" h	53.4" w X 66" h X 27.3" d	55.7 CU. FT.
H1	LIFT-UP	(2) 23.25" w X 73.25" h	174.7" w X 24.8" h X 29.2" d	73.2 CU. FT.

RIGHT SIDE COMPARTMENTS				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
R1	ROLL-UP	50.5" w X 55.4" h	56.1" w X 66" h X 27.3" d	58.5 CU. FT.
R2	ROLL-UP	57.5" w X 26.2" h	61.6" w X 36.8" h X 27.3" d	29.8 CU. FT.
R3	ROLL-UP	50.5" w X 55.4" h	53.4" w X 66" h X 27.3" d	55.7 CU. FT.
H2	LIFT-UP	(2) 9.25" w X 73.25" h	174.7" w X 24.8" h X 14.2" d	35.6 CU. FT.

REAR STEP COMPARTMENT				
COMPT	DOORS	OPENING DIMENSIONS	INSIDE DIMENSIONS	VOLUME
A1	ROLL-UP	37.5" w X 30.8" h	40" w X 40" h X 31" d	28.7 CU. FT.

TOTAL: 437.5 CU.FT.

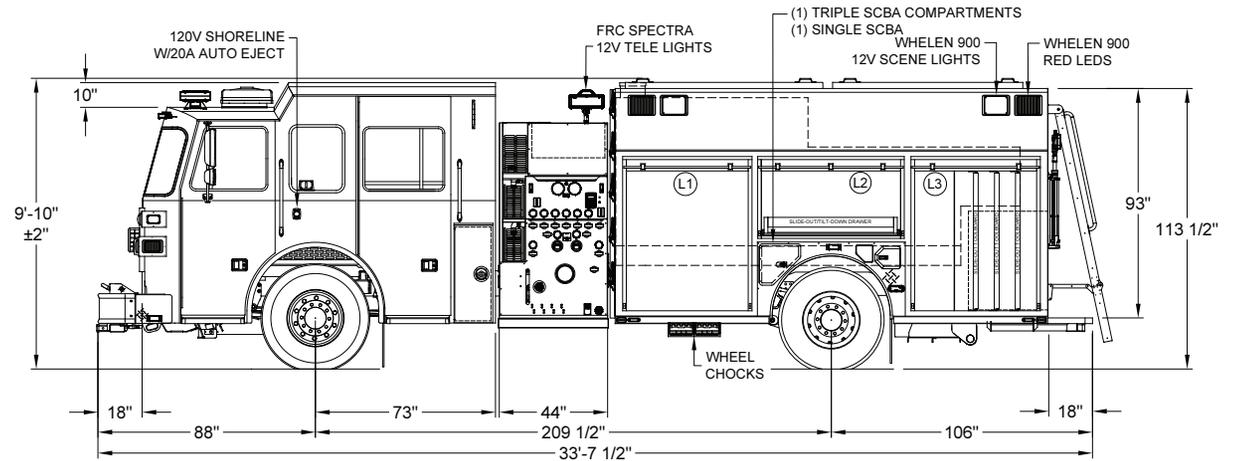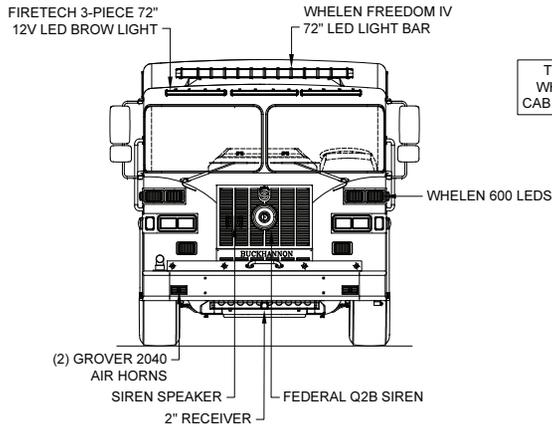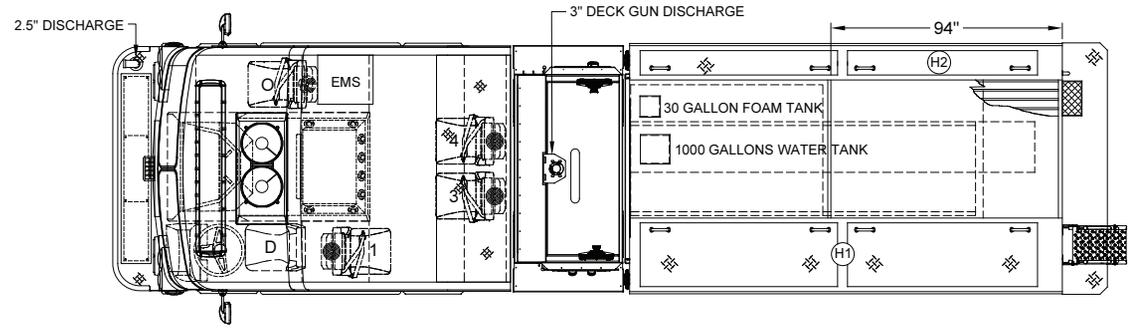

DIMENSIONS SHOWN ON THIS DRAWING ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS DURING CONSTRUCTION.

IN THE EVENT OF A DISCREPANCY BETWEEN THE SUTPHEN SPECIFICATIONS AND DRAWING, THE SUTPHEN SPECIFICATIONS SHALL PREVAIL.

DRAWING IS FOR REFERENCE ONLY. SOME ITEMS PROPOSED MAY NOT BE SHOWN OR NOTED.

CUSTOMER APPROVAL

NAME: _____

TITLE: _____

DATE: _____

REV.	DESCRIPTION	BY	DATE
H	COMPONENT REPORT UPDATED / ADD ION WARNING LIGHT IN RUBRAIL BELOW L1 AND R1 / ADD ADDITIONAL VERTICAL PANEL IN L3	MJC	12/21/21
G	TWO TONE BODY CHANGED TO SINGLE TONE / COMPONENT REPORT UPDATED	MJC	05/28/21
F	CHANGED LADDER RACK FOR (2) NY HOOK PIKE POLES / COMPONENT REPORT UPDATED	MJC	05/10/21
E	MOVED WATER AND FOAM TOWERS / REMOVE NOTCH IN WATER TANK	MJC	03/22/21

DRAWN BY:
 M.CLARK

DATE:
 08/10/20

MFG. FACILITY:
 DUBLIN

BUCKHANNON FIRE DEPARTMENT
 BUCKHANNON, WV

CUSTOM PUMPER - S8

DWG. NO.: HS-6877